

Extending LS Insight

LS Insight 2022.3 and later versions

Contents

1	Introduction	4
2	Initial setup	4
3	Add Company	4
4	Staging	5
	Adding new affix.....	5
	Adding new prestaging table – LS Central SaaS only	6
	Adding new staging table.....	6
5	Dimensions	9
	Add new column to existing dimension.....	9
	Add column to dimension	9
	Add new dimension.....	12
6	Facts	14
	Add new column from staging table to existing fact table	14
	Add column to fact table	14
	Modify stored procedure	14
	Add new fact table	16
7	Third-party data	17
	Open the Azure Data Factory studio	17
	Staging data	17
	Create a copy pipeline	17
	Add Pipeline variables	18
	Copy Activity	19
	Create a new source connection	19
	Connect to your data	21
	Set the pre-copy script	21
	Add Write to audit table action	22
	Update LSInsightAudit on success	23
	Update LSInsightAudit on failure	24
	Large data source	24

Add staging pipeline to scheduled run	25
Add fact table to star schema	27
Create a connected fact table	27
Create a Stored Procedure	27
Add a fact table Stored Procedure to ADF pipeline	29
Add data directly in Power BI	33
Get a new source	33
Merge to get surrogate keys	33
Expand merged tables	34
Remove unnecessary columns	35
M query	35
Define relationships in PowerBI	36
Use the new data in a report page.....	37

1 Introduction

This document describes how to extend the LS Insight data warehouse and reports.

LS Insight has always been thought of as a product that provides a BI base for our customers that currently have no BI solution in place.

With LS Insight we provide a basic extendable data warehouse in SQL server database and Power BI reports and measures that work with the data structure of the warehouse.

We have therefore always encouraged extending LS Insight in any way that suites the customer and have now decided to provide more detailed guidelines and examples of how to extend LS Insight with data from LS Central base or extensions and third-party data.

2 Initial setup

The initial setup of LS Insight is described in detail in the [onboarding documentation](#) in the LS Insight section the LS Central online help and will not be explained here.

3 Add Company

In the initial setup you select which companies you want to load to LS Insight.

If you want to add a new company to your LS Insight setup at a later stage, that is easy to do .

You can add to the **LSInsight\$PublisherAffixReg** table using the **Add or Delete App Affix** pipeline in the LS Insight ADF.

When you add the trigger for the pipeline you are prompted with several fields:

- Companies (Company name as it is on the Companies page in LS Central).
 - You can add/delete several companies simultaneously by separating them with a comma.
- Delete Companies (default setting is false, but if set to true the entered companies will be deleted.)

Once you have added/deleted the companies you want to include/remove from LS Insight, you need to manually run the **Generate LS Insight Query Base** pipeline. To update the query base, you run the **Scheduled Run** or wait for the next scheduled run. Data from the companies you added/removed will be added or removed from the staging, dimension, and fact tables when the **Scheduled Run** pipeline runs.

4 Staging

Staging tables in LS Insight are each based on one table in Business Central (BC) plus its extensions. The base table and the extension tables are joined together to form one large table with all columns from both base and extension tables and an additional column with the Company name.

The **Item** table is a perfect example.

In BC there is a base Item table and then you have a few Item extension tables that come with LS Central.

Each Item extension table has an extension GUID. The base table also has a GUID that is the same for all BC base tables.

Each column of an extension table has the appropriate prefix, so if you have more extensions in your LS Central instance, they will also be added to the Item staging table in LS Insight.

Stand-alone extension tables that are tables that do not extend an existing table have a name that is affixed with a partner prefix or suffix. For LS Central this prefix is LSC. These tables can also serve as base tables. If an extension adds a new table or extends an existing one and you want to include this table or additional column in LS Insight you need to add the extension GUID and affix to the **LSInsight\$PublisherAffixReg** table.

Between LS Central versions 17.4 and 17.5, when the table names were prefixed along with the AL objects, some of the table names became too long and were changed. So, to not have to change the name of the staging tables in LS Insight we created a mapping from the original table names to the prefixed ones. This mapping is stored in the **LSInsight\$SourceTablesMap** table.

In NAV versions older than 14.2 tables were not extended in this manner.

Adding new affix

If you want to extend LS Insight with staging tables from an extension that you have added to your LS Central instance, you need to start by adding the affix to the **LSInsight\$PublisherAffixReg** table.

You can add to the **LSInsight\$ PublisherAffixReg** table using the **Add or Delete App Affix** pipeline in the LS Insight ADF.

When you add the trigger for the pipeline you are prompted with several fields:

- AppID (extension GUID from LS Central table)
- AppName (name of installed extension)
- Publisher (name of publisher of Extension)
- Prefix (the three-letter prefix used, if used. Not required)
- Suffix (the three-letter suffix used, if used. Not required)

These are the fields you need to populate to add a record to the table.

In addition, there is the DeleteApp field that decides whether a record is added or deleted from the table. It is set to FALSE by default, but if it is changed to TRUE it deletes a matching record from the table. When deleting, all you need to do is enter the Extension GUID in the AppID field and change the DeleteApp value to TRUE. You can only add or delete one App record at a time.

Adding new prestaging table – LS Central SaaS only

If you are running LS Insight against LS Central SaaS, you need to add the new prestaging tables manually to the LS Insight database.

This can be done by accessing the Scheduler server database, that you are using to schedule the replication jobs, and saving a creation script for the tables you want to add. If the table is extended, you need to save scripts for the base and extension tables.

You can then either modify the creation script like we have done for the prestaging scripts included in the product package (so it queries the **LSInsight\$Companies** table to create a table for each company), or you can have a script per company.

The prestaging scripts are included in the product package under the

.. \Modules\LSInsight\Resources\Prestaging tables folder

Once you have created the prestaging script, you need to add the table as subjob to the appropriate scheduler jobs to replicate the data from the LS Central SaaS source table to the LS Insight prestaging table.

Adding new staging table

SourceTableName	PrefixedSourceTableName	IncludeTable
Commission Salesperson Gro...	LSC Cmsn Salesperson Group	FALSE
Company	NULL	TRUE
Country_Region	NULL	TRUE
Customer	NULL	TRUE
Customer Order Discount Line	LSC CO Discount Line	FALSE
Customer Order Status	LSC Customer Order Status	FALSE
Customer Order Status Log	LSC Customer Order Status ...	FALSE
Default Product Group Labels	LSC Default Product GRP La...	FALSE
Default Restaurant Menu Type	LSC Default Rest Menu Type	FALSE
Detailed Revenue Entry	LSCHT Detailed Revenue En...	TRUE
Dimension Value	NULL	TRUE

To add a new staging table to LS Insight you simply add it to the **LSInsight\$SourceTablesMap** table. You need to add the **table name** you want to use for the staging table in **SourceTableName** column and the actual name of the table in LS Central, without any GUID or Company name, in **PrefixedSourceTableName** column and set the Include field to **TRUE**. If the actual name of the table in LS Central is the same as the name you want use for the staging table then the value in **PrefixedSourceTableName** column can be NULL.

If the Include Table field is set to false, the table will not be included in LS Insight staging.

Currently, all the base tables used in LS Insight have been added to this table in the template database, so you only need to add to it if you want to add tables that are currently not used in LS Insight.

We have also added all the table names that were shortened in version 17.5 when the prefix was added so if you are adding a new source table you should always check whether it exists in the list and if it does you only need to change the **IncludeTable** column value from FALSE to TRUE.

You can add to the **LSInsight\$SourceTablesMap** table using the **Add or Delete Source Tables** pipeline in the LS Insight ADF.

In the example below we will show how you would add a staging table to LS Insight for one table

CRONUS - LS Central\$LSC Activity Label Script Line\$5ecfc871-5d82-43f1-9c54-59685e82318d

When you trigger the pipeline you are prompted to add a value to the **SourceTableName** and **PrefixSourceTableName** fields, you can only add or delete one table at a time. If you add the value TRUE to the DeleteRow field, the source table name you specify will be deleted from the table if it exists. If you are adding a source table that is a BC standard table or you want the name of the new staging table to include the prefix, you can leave the **PrefixSourceTableName** value empty.

Pipeline run

⚠ Trigger pipeline now using last published configuration.


Parameters

Name	Type	Value
SourceTableName	string	<input style="width: 100%;" type="text" value="Activity Label Script Line"/>
PrefixSourceTableName	string	<input style="width: 100%;" type="text" value="LSC Activity Label Script Line"/>
DeleteRow	string	<input style="width: 100%;" type="text" value="FALSE"/>


When the pipeline has run and entry for the table has been added to **LSInsight\$SourceTablesMap** table.

	SourceTableName	PrefixSourceTableName	IncludeTable
10	ACI User Group	LSC ACI User Group	TRUE
11	ACI User Group Member	LSC ACI User Group Member	TRUE
12	Activity Access Profile Line	LSC ACT Access Profile Line	FALSE
13	Activity Allowance Consumption	LSC ACT Allowance Consumpt.	FALSE
14	Activity Allowance Restriction	LSC ACT Allowance Restriction	FALSE
15	Activity Archive Process Log	LSC ACT Archive Process Log	FALSE
16	Activity Attrib. Option Value	LSC ACT Attrib. Option Value	FALSE
17	Activity Attribute Assignment	LSC ACT Attribute Assignment	FALSE
18	Activity Availability Method	LSC ACT Availability Method	FALSE
19	Activity Cancellation Policy	LSC ACT Cancellation Policy	FALSE
20	Activity Category Sales WrkTbl	LSC ACT Category Sales Wr...	FALSE
21	Activity Group Additional Item	LSC ACT Group Additional It...	FALSE
22	Activity Label Script Line	LSC Activity Label Script Line	TRUE
23	Activity Location Opening Hour	LSC ACT Location Opening ...	FALSE

You can then move on and run the **Initial load** pipeline.

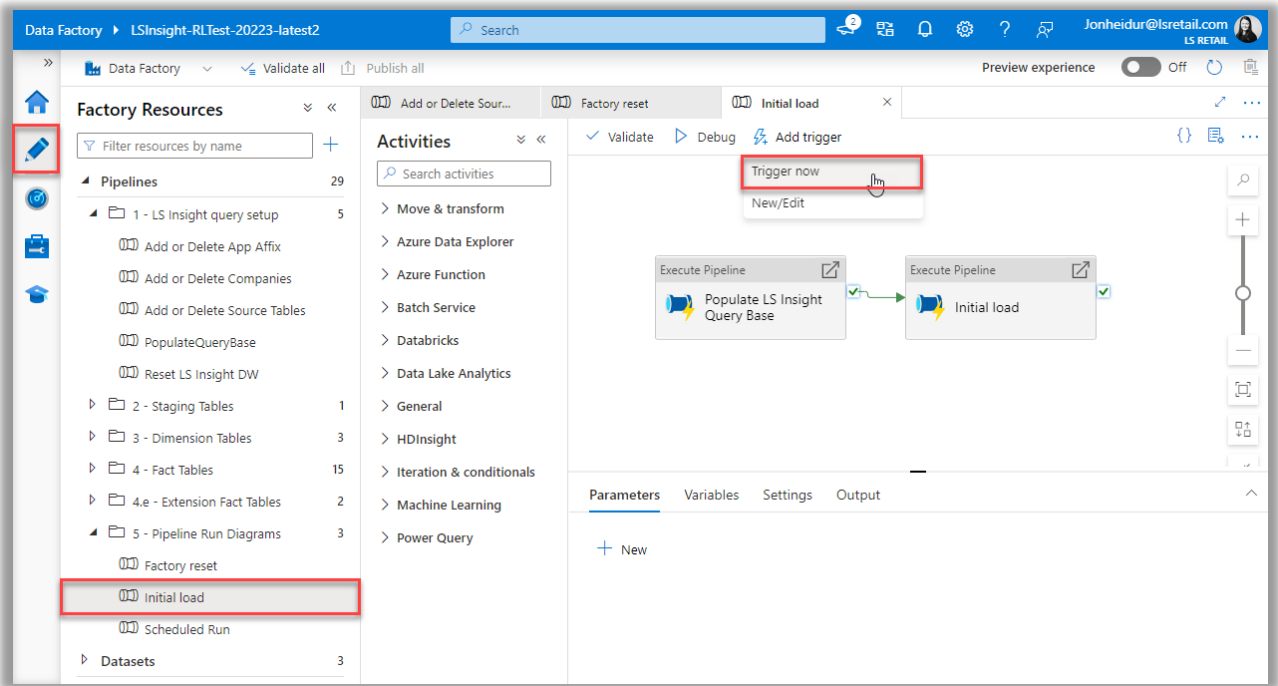

This pipeline will fetch all the information about the tables from LS Central, create the query for the new table and write this information to the **LSInsight\$QUERY BASE** table, in addition to updating the queries for the other staging tables, if anything has changed in the LS Central database since this was run initially.

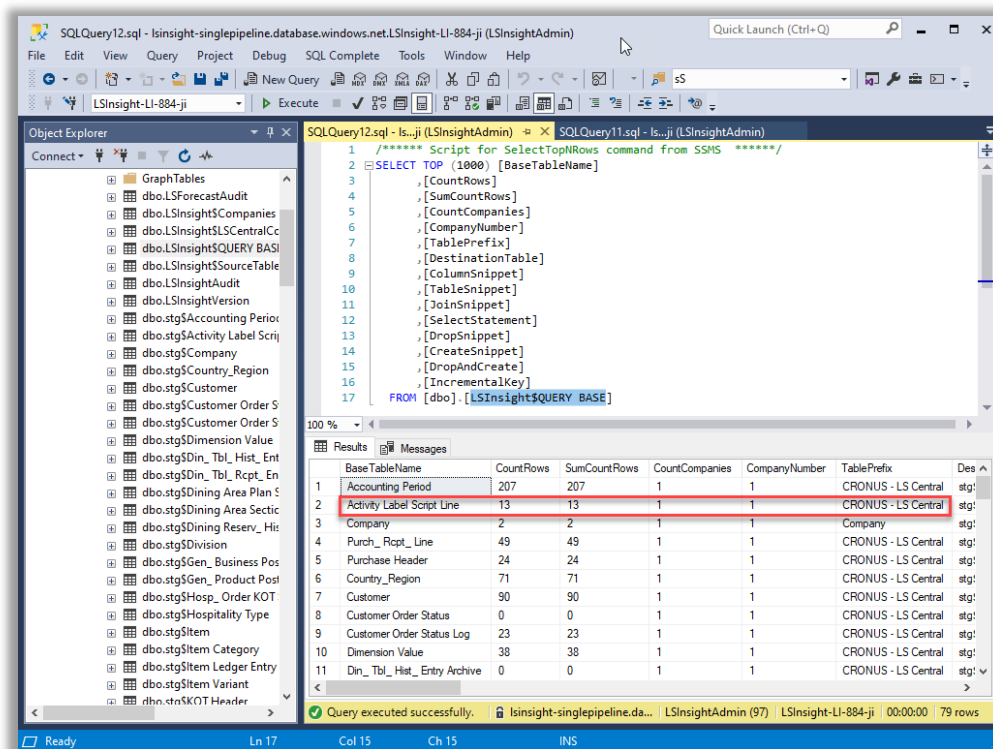

The initial load pipeline also triggers a run of the **Scheduled Run** pipeline that creates and populates the new or updated staging table.

Once the pipeline has run the staging table should be populated. This does, however, not have any impact on the dimension or fact tables since those are populated using stored procedures that need to be created in the database according to the star schema design rules.

In the next sections we will explain in more detail how you can add a column to a dimension, add a new dimension and connect it to a fact table. And then how you can update the reports to include the new information.

5 Dimensions

The dimension tables are populated and updated by a stored procedure. The dimension stored procedures often combine more than one staging table into a single dimension.

All dimensions included in the DW have been created by the LS Insight team and are included in the LS Insight database.

Add new column to existing dimension

If you want to add new columns from new or existing staging tables that is a very straight forward process.

Let's imagine that you want to add information about whether an item is a scale item or not so you can see whether that is impacting sales in any way and so you can compare sales between stores for scale items only, since you have a feeling that some stores sell more scale items than others, but you want to confirm that suspicion.

The **stg\$Item** table has a field called "Scale Item" that you can use to distinguish between scale items and non-scale items.

Add column to dimension

The first thing you do is add a new column to the **dlItem** dimension table.

The best way to edit a table in an existing LS Insight database is to connect to the database using SQL Server Management Studio (SSMS).

We recommend connecting to the Azure database from SSMS (the connection information for the LS Insight database was provided in the deployment summary) and then following these steps:

- 1) In the LS Insight database expand Tables.
- 2) Select the **dlItem** table
- 3) Right-click and select Script Table as > DROP and CREATE To > New query editor window.
- 4) The script will open in a new window.
- 5) In the CREATE TABLE part of the script, add the new column. Here you can use the same datatype as in the staging table if you are using the value as is, or you can change it if you want to transform the value in any way.

```

46 CREATE TABLE [DW].[dItem](
47     [SK_Item] [int] IDENTITY(-1,1) NOT NULL,
48     [Company] [int] NOT NULL,
49     [No] [nvarchar](100) NOT NULL,
50     [Description] [nvarchar](100) NULL,
51     [Category] [nvarchar](100) NULL,
52     [ProductGroup] [nvarchar](100) NULL,
53     [InventoryPostingGroup] [nvarchar](100) NULL,
54     [BaseUnitOfMeasure] [nvarchar](100) NULL,
55     [Item Capacity Value] [decimal](38, 20) NULL,
56     [UnitPrice] [decimal](38, 20) NULL,
57     [LastItemCost] [decimal](38, 20) NULL,
58     [VendorNo] [nvarchar](100) NULL,
59     [VendorItemNo] [nvarchar](100) NULL,
60     [Division] [nvarchar](100) NULL,
61     [Scale Item] [tinyint] NULL,
62     [RowID] [bigint] NULL,
63     [Batchdate] [datetime] NULL,

```

- 6) Then add an ALTER TABLE section to set the default value of the new column. In this example we have set the default value to zero. But the default selected depends on the datatype.
- 7) Now run the script
- 8) The message “Commands completed successfully” is displayed, and the table will be dropped and recreated including the new column. The table will be empty and to populate it again you need to edit the dimMergedItem stored procedure.

To modify the stored procedure that loads data into the dItem table, do the following in SSMS:

- 1) In the LS Insight database expand Programmability.
- 2) Select the dbo.dimMergedItem (or vX.XdimMergedItem) stored procedure for the LS Central version you are using.
- 3) Right-click and select Modify.
- 4) A modification script for the procedure is opened.
- 5) Since you are already selecting from the **stgItem** table in the procedure, you just need to add the column where needed, and since this is tiny int value there is no need to check for NULL values. So, what you do is select from the Scale item column into the temp table and add it to the GROUP BY aggregation as well.

```

114 tItem
115 AS
116 (SELECT
117     ,sITM.[CompanyPrefix]
118     ,sITM.[No_] AS [No]
119     ,sITM.[Description]
120     ,COALESCE(tITC.[Description], '') AS [Category]
121     ,COALESCE(tRPG.[Description], '') AS [ProductGroup]
122     ,sITM.[Inventory Posting Group]
123     ,sITM.[Base Unit of Measure]
124     ,sITM.[Item Capacity Value]
125     ,COALESCE(tSAP.[Unit Price], 0) AS [Unit Price]
126     ,CASE sITM.[Costing Method]
127         WHEN 4 THEN COALESCE(IFSITM.[Standard Cost] = 0, NULL, sITM.[Standard
128         ELSE COALESCE(IFSITM.[Last Direct Cost] = 0, NULL, sITM.[Last Direct
129     END AS [LastItemCost]
130     ,sITM.[Vendor No_]
131     ,sITM.[Vendor Item No_]
132     ,COALESCE(tDIV.[Description], '') AS [DivisionName]
133     ,sITM.[Scale Item]
134     ,MAX(sITM.[bigint_timestamp]) AS [RowID]
135     ,GETUTCDATE() AS [BatchDate]
136 FROM [Stg$Item] sITM
137 LEFT JOIN [tItemCategory] tITC
138     ON sITM.[CompanyPrefix] = tITC.[CompanyPrefix]
139     AND sITM.[Item Category Code] = tITC.[Code]
140 LEFT JOIN [tProductGroup] tRPG
141     ON sITM.[CompanyPrefix] = tRPG.[CompanyPrefix]
142     AND sITM.[Retail Product Code] = tRPG.[Code]
143 LEFT JOIN [tDivision] tDIV
144     ON sITM.[CompanyPrefix] = tDIV.[CompanyPrefix]
145     AND sITM.[Division Code] = tDIV.[Code]
146 LEFT JOIN [tSalesPrice] tSAP
147     ON sITM.[CompanyPrefix] = tSAP.[CompanyPrefix]
148     AND sITM.No_ = tSAP.[Item No_]
149 GROUP BY sITM.CompanyPrefix
150     ,sITM.[No_]
151     ,sITM.[Description]
152     ,tITC.[Description]
153     ,tRPG.[Description]
154     ,sITM.[Inventory Posting Group]
155     ,sITM.[Base Unit of Measure]
156     ,sITM.[Item Capacity Value]
157     ,sITM.[Unit Price]
158     ,COALESCE(IFSITM.[Standard Cost] = 0, NULL, [Standard Cost]), IFSITM.[Last Di
159     ,COALESCE(IFSITM.[Last Direct Cost] = 0, NULL, [Last Direct Cost]), IFSITM.[
160     ,sITM.[Vendor No_]
161     ,sITM.[Vendor Item No_]
162     ,tDIV.[Description]
163     ,tSAP.[Unit Price]
164     ,sITM.[Costing Method]
165     ,sITM.[Scale Item]

```

If the column you wanted to add to the dimension was from a new staging table, you would need to create a temp table for that staging table as you did for ItemCategory and ProductGroup and do the join here. As you can see from the other join statements, we do a LEFT JOIN on the ID and the CompanyPrefix.

- 6) Then select the column from tItem in the MERGE section.

```

166 MERGE [DW].[dItem] AS Target USING (SELECT
167     ,COALESCE(dCOM.[SK_Company], -1) AS [Company]
168     ,tITM.[No]
169     ,tITM.[Description]
170     ,tITM.[Category]
171     ,tITM.[ProductGroup]
172     ,tITM.[Inventory Posting Group]
173     ,tITM.[Base Unit of Measure]
174     ,tITM.[Item Capacity Value]
175     ,tITM.[Unit Price]
176     ,tITM.[LastItemCost]
177     ,tITM.[Vendor No_]
178     ,tITM.[Vendor Item No_]
179     ,tITM.[DivisionName]
180     ,tITM.[Scale Item]
181     ,tMRI.[RowID]
182     ,tITM.[BatchDate]
183 FROM [tItem] tITM
184 RIGHT JOIN [tMAXRowIDItem] tMRI
185     ON tITM.[CompanyPrefix] = tMRI.[CompanyPrefix]
186     AND tITM.[No] = tMRI.[No_]
187     AND tITM.[RowID] = tMRI.[RowID]
188 LEFT JOIN [DW].[dCompany] dCOM
189     ON tITM.[CompanyPrefix] = dCOM.[CompanyPrefix] AS Source

```

- 7) Add the column to the UPDATE statement.

```

WHEN MATCHED
  THEN UPDATE
    SET [Description] = Source.[Description]
      ,[Category] = Source.[Category]
      ,[ProductGroup] = Source.[ProductGroup]
      ,[InventoryPostingGroup] = Source.[Inventory Posting Group]
      ,[BaseUnitOfMeasure] = Source.[Base Unit of Measure]
      ,[Item Capacity Value] = Source.[Item Capacity Value]
      ,[UnitPrice] = Source.[Unit Price]
      ,[LastItemCost] = Source.[LastItemCost]
      ,[VendorNo] = Source.[Vendor No_]
      ,[VendorItemNo] = Source.[Vendor Item No_]
      ,[Division] = Source.[DivisionName]
      ,[Scale Item] = Source.[Scale Item]
      ,[RowID] = Source.[RowID]
      ,[Batchdate] = Source.[Batchdate]

```

- 8) And lastly, add the column to the INSERT statement.

```

WHEN NOT MATCHED BY TARGET
  THEN INSERT ([Company], [No], [Description], [Category], [ProductGroup],
  [InventoryPostingGroup], [BaseUnitOfMeasure], [Item Capacity Value],
  [UnitPrice], [LastItemCost], [VendorNo], [VendorItemNo], [Division], [Scale
  Item], [RowID], [BatchDate])
  VALUES (Source.[Company], source.[No], Source.[Description],
  Source.[Category], Source.[ProductGroup], Source.[Inventory Posting Group],
  Source.[Base Unit of Measure], Source.[Item Capacity Value], Source.[Unit
  Price], Source.[LastItemCost], Source.[Vendor No_], Source.[Vendor Item
  No_], Source.[DivisionName], Source.[Scale Item], Source.[RowID],
  Source.[BatchDate])

```

- 9) Now run the ALTER procedure script.
 10) A “Commands completed successfully” message is displayed.

Now that the procedure has been modified, you can either execute it from SSMS or you can trigger the Scheduled Run pipeline from Azure Data Factory.

When the procedure has been executed, the data in the new column has been populated with the correct data from the staging table.

Add new dimension

If you would like to add a new dimension to the LS Insight data warehouse from LS Central, the process is straight forward.

Here are the steps you need to follow:

1. The first thing you do is add the table name to the **LSInsight\$SourceTables** table. Using the **Add or Delete Source Tables** pipeline in the Azure data factory.
2. Re-run the **Populate Query Base** pipeline in the Azure data factory.

3. Run the **Scheduled Run** pipeline to retrieve the data from the new tables.
4. Create a new dimension table with the columns you want to include.
5. Create a new stored procedure to populate the dimension table with data from one or more staging tables. For the stored procedure to be run automatically you must keep to the naming convention and prefix SP name with 'dim'.
6. Add connections from this new dimension table to the appropriate fact tables.

There are several dimension tables in the DW schema that you can use as examples for this, and you can view the stored procedure used to populate them from the staging tables under Programmability. All the dimension stored procedures are prefixed with 'dim'.

6 Facts

Add new column from staging table to existing fact table

To add a new column from staging table to fact table you would go through a similar process as was used for new column to a dimension table. But since the stored procedures that update fact and dimension tables are different, we will go through an example.

In the following example we will show how to add the points column from the stg\$xxx table to the fDiscount table and how to modify the stored procedure that loads the fDiscount table, so it includes inserts and updates to the newly added column.

Add column to fact table

The first thing you do is add a new column to the **fDiscount** fact table.

The best way to edit a table in an existing database is to connect to the database using SQL Server Management Studio (SSMS).

We recommend connecting to the Azure database from SSMS (the connection information for the LS Insight database was provided in the deployment summary) and then following these steps:

- 1) In the LS Insight database, open a new query.
- 2) Enter the following ALTER script for the fDiscount table:

```
2  
3 ALTER TABLE [DW].[fDiscounts]  
4 ADD [Points] [decimal](38, 20) NULL  
5 GO  
6
```

- 3) If you want, you can add a default value constraint of the new column. In this example we have not set a default value.
- 4) Now run the script.
- 5) A Commands completed successfully message is displayed, the table will be altered, and the new column added but containing only NULL values. To populate the new column with values, you need to modify the stored procedure that loads the fDiscount table.

Modify stored procedure

To modify the stored procedure that loads data into the dlItem table, do the following in SSMS:

- 1) In the LS Insight database, expand Programmability.
- 2) Select the dbo.factDiscount.
- 3) Right-click and select Modify.
- 4) A modification script for the procedure opens.

Since you are already selecting from the stg\$ table in the procedure, you just need to add the column reference where needed, and since this is decimal value there is no need to check for NULL values. So, what you do in the tDiscount temp table creation selection, is select from the [Points] column in the **stg\$Trans_Discount Entry** staging table.

```

70 /*Temp table for Discount entries*/
71 tDiscounts
72 AS
73 (SELECT
74     ,sTDE.[CompanyPrefix]
75     ,CAST(sTRH.[Date] AS DATE) AS [Date]
76     ,CAST(DATEADD(mi, DATEDIFF(mi, 0, sTRH.[Time]), 0) AS TIME) AS [Time]
77     ,tLOC.[SK_Location]
78     ,tOFF.[SK_Offer]
79     ,tPOT.[SK_POSTerminal]
80     ,CASE sTDE.[Offer Type]
81         WHEN 0 THEN 'Promotion'
82         WHEN 1 THEN 'Deal'
83         WHEN 2 THEN 'Multibuy'
84         WHEN 3 THEN 'Mix&Match'
85         WHEN 4 THEN 'Disc. Offer'
86         WHEN 5 THEN 'Total Discount'
87         WHEN 6 THEN 'Tender Type'
88         WHEN 7 THEN 'Item Point'
89         WHEN 8 THEN 'Line Discount'
90         WHEN 9 THEN 'Customer'
91         WHEN 10 THEN 'Infocode'
92         WHEN 11 THEN 'Member Point'
93         WHEN 12 THEN 'Coupon'
94         WHEN 13 THEN 'Total'
95         WHEN 14 THEN 'Line'
96         ELSE 'No Offer type'
97     END AS [Offer Type]
98     ,sTDE.[Receipt No_]
99     ,sTDE.[Line No_]
100    ,CAST(sTDE.[Transaction No_] AS NVARCHAR(100)) AS [TransactionNo]
101    ,sTDE.[Discount Amount]
102    ,sTDE.[Points]
103    ,sTDE.bigint_timestamp AS [RowID]
104 FROM [stg$Trans_Discount Entry] sTDE
105 LEFT OUTER JOIN [stg$Transaction Header] sTRH
106 ON sTDE.[Store No_] = sTRH.[Store No_]
107 AND sTDE.[POS Terminal No_] = sTRH.[POS Terminal No_]
108 AND sTDE.[Transaction No_] = sTRH.[Transaction No_]
109 AND sTDE.[CompanyPrefix] = sTRH.[CompanyPrefix]

```

If the column you wanted to add to the fact table was from a new staging table, you would need to add this new staging table to the left outer join below.

5) Select the column from tDiscounts in the MERGE section:

```

MERGE [Dw].[fdDiscounts] AS TARGET USING (SELECT
    ,COALESCE(dCOM.[SK_Company], -1) AS [Company]
    ,tDIS.[Date]
    ,tDIS.[Time]
    ,COALESCE(tDIS.[SK_Location], -1) AS [SK_Location]
    ,COALESCE(tDIS.[SK_Offer], -1) AS [SK_Offer]
    ,COALESCE(tDIS.[SK_POSTerminal], -1) AS [SK_POSTerminal]
    ,COALESCE(tSAL.[SK_Item], -1) AS [SK_Item]
    ,COALESCE(tSAL.[SK_Member], -1) AS [SK_Member]
    ,COALESCE(tSAL.[SK_Staff], -1) AS [SK_Staff]
    ,tDIS.[Offer Type]
    ,tDIS.[Receipt No_]
    ,tDIS.[Line No_]
    ,tDIS.[TransactionNo]
    ,tDIS.[Discount Amount]
    ,tDIS.[Points]
    ,tSAL.NetSalesAmountLCY AS SalesAmount
    ,tSAL.CostAmountLCY AS CostAmount
    ,tDIS.[RowID]

```

6) Add the column to the UPDATE statement:

```

WHEN MATCHED
THEN UPDATE
    SET [Time] = Source.[Time]
    , [Receipt No_] = Source.[Receipt No_]
    , [Discount Amount] = Source.[Discount Amount]
    , [Points] = Source.[Points]
    , [RowID] = Source.[RowID]
    , [Batchdate] = GETUTCDATE()
    , [SK_Item] = Source.[SK_Item]
    , [SK_Member] = Source.[SK_Member]
    , [SK_Staff] = Source.[SK_Staff]
    , [SalesAmount] = Source.[SalesAmount]
    , [CostAmount] = Source.[CostAmount]

```

7) And lastly, add the column to the INSERT statement.

```

WHEN NOT MATCHED BY TARGET
  THEN INSERT ([Company]
    , [Date]
    , [Time]
    , [SK_Location]
    , [SK_Offer]
    , [SK_POSTerminal]
    , [Offer Type]
    , [Receipt No_]
    , [Line No_]
    , [TransactionNo]
    , [Discount Amount]
    , [Points]
    , [RowID]
    , [Batchdate]
    , [SK_Item]
    , [SK_Member]
    , [SK_Staff]
    , [SalesAmount]
    , [CostAmount])
  VALUES (Source.[Company], Source.[Date], Source.[Time],
    Source.[SK_Location], Source.[SK_Offer],
    Source.[SK_POSTerminal], Source.[Offer Type], Source.[Receipt
    No_], Source.[Line No_], Source.[TransactionNo],
    Source.[Discount Amount], Source.[Points], Source.[RowID],
    GETUTCDATE(), Source.[SK_Item], Source.[SK_Member],
    Source.[SK_Staff], Source.[SalesAmount], Source.[CostAmount]);

```

- 1) Run the ALTER procedure script.
- 2) A Comands completed successfully message is displayed.

Now that the procedure has been modified, you need to execute it from SSMS with these parameter values:

```
@CurrentRowID = 0
```

```
@NewRowID = 999999999999999
```

This will ensure that all the rows of the factDiscount table will be updated with the points value from the staging table.

Add new fact table


The steps needed to add a new fact table to the LS Insight data warehouse are described in chapter **7.4 Adding fact table to star schema** in the section about third-party data. The process of creating a new fact table from LS Central data is exactly the same, but in that case the staging tables hold data from LS Central instead of third-party data.

7 Third-party data

Here are the recommended steps you need to take to add third-party data to LS Insight. In this example you will be adding customer counter data from file. We will first describe how to add the data to the LS Insight data warehouse, and then how the data could be added directly to the Power BI report, if you want to bypass the data warehouse.

Open the Azure Data Factory studio

Log into your Azure environment (<https://portal.azure.com/>), and open the LS Insight Azure Data Factory. You will find all resources in “All resources”.

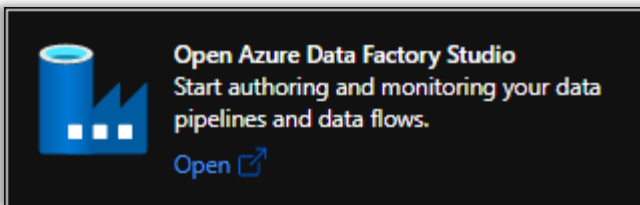


Staging data


The first step is to get the source data in a staging table in the data warehouse (DW). In some scenarios this is not needed, but it is good practice to stage the source data before cleaning and writing to the star schema tables. There are many methods available to ingest the data and create the staging table – in this example we are using Azure data factory (ADF).

Create a copy pipeline

Open the editor option, and click the three dots next to “2 – Staging Tables”:

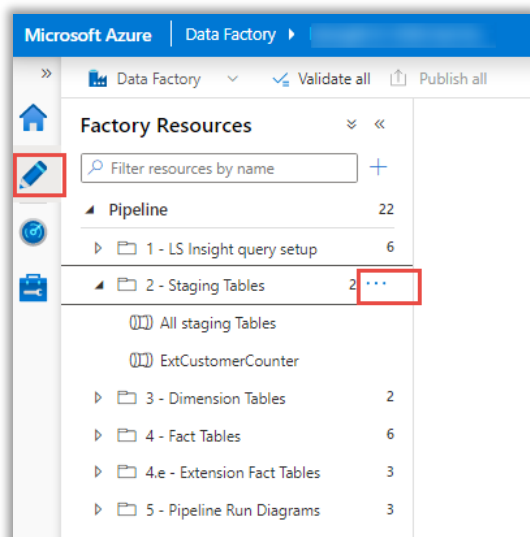


Select to create a new pipeline in the selected folder by clicking **New pipeline**. And give it a descriptive name. It is a good idea to add an affix to the name to distinguish it from LS Insight pipelines.

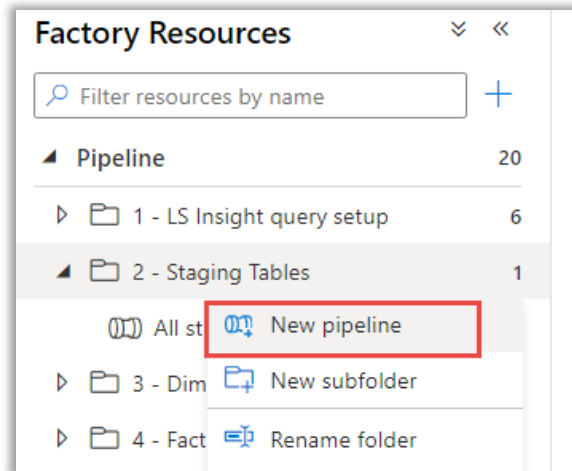


Add Pipeline variables

Add a pipeline variable name “PipelineStart” to hold value of utcnow() to be able to log the pipeline start in the LSInsightAudit table in the LS Insight database.

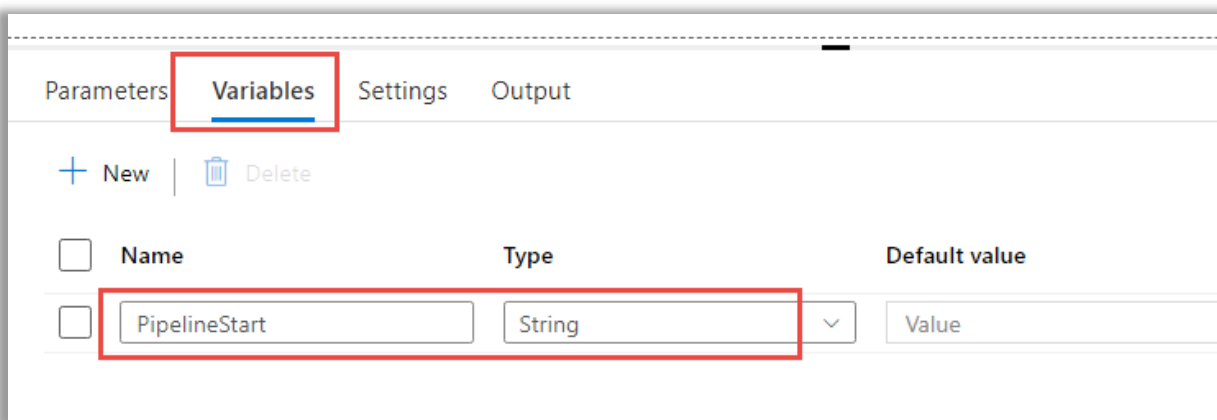


Set the current timestamp using the “Set variable” activity using “Add dynamic content”

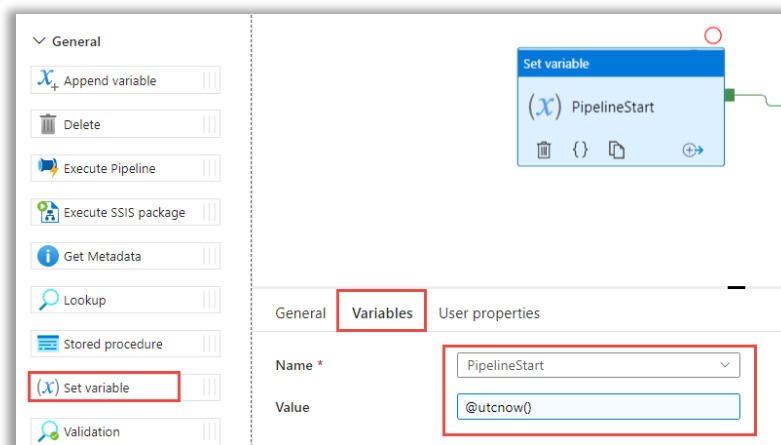


Copy Activity

Add a copy activity to copy the data from the source and write to a staging table in your DW.

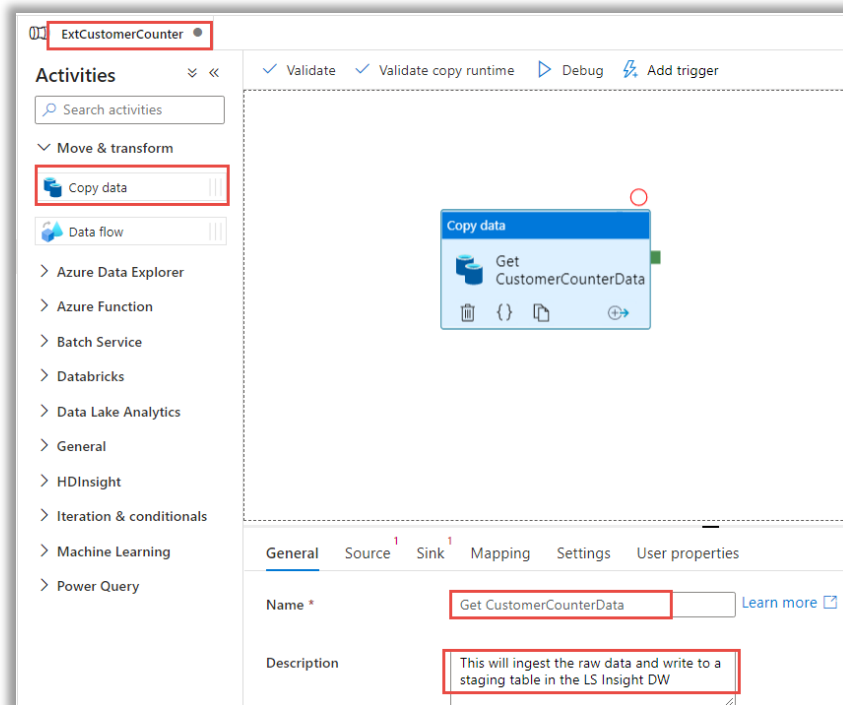


Create a new source connection

The source connection needs to be set. If this connection does not exist in your ADF, a new connection is created in the copy activity.

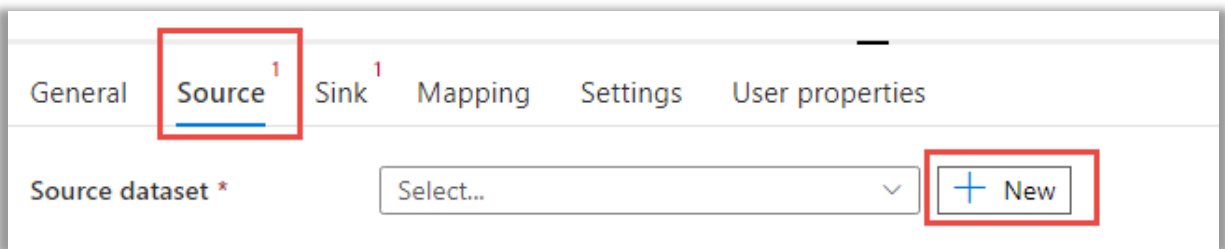

For this example, you will be using a flat file connection – you can choose from over 200 connectors, depending on your data.

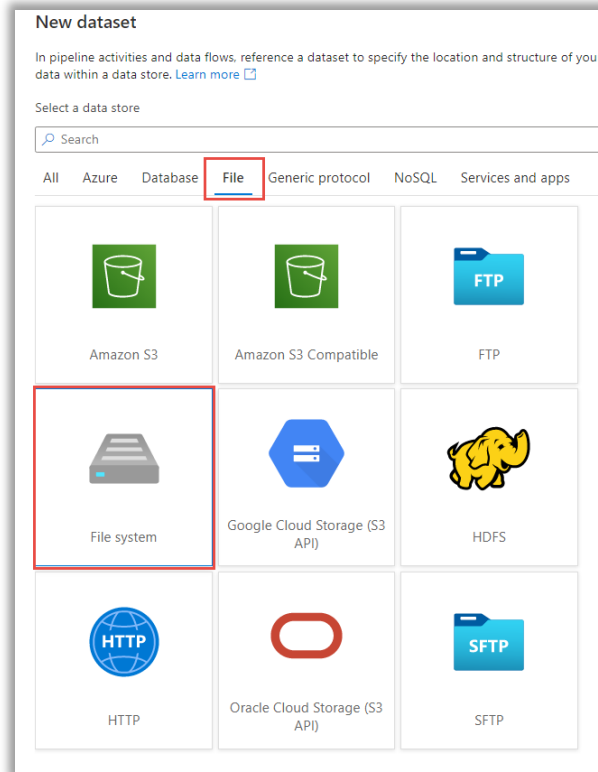

Create a connection to the host.

New linked service (File system)

Name *

Description

Connect via integration runtime * ⓘ

Host * ⓘ

User name *

Password *

Annotations

> Parameters

> Advanced ⓘ

Connect to your data

Using the connection, select the data source. In this example the source is a text file in your local file system.

Set properties

Name: MyCustomerCounterData

Linked service *: MyCustomerCounterServer

File path: C:\CustomerCounter / Directory / StoreCustomerCounterData

First row as header:

Import schema: From connection/store From sample file None

Set the pre-copy script

In this example the full dataset is written to the staging table. The pre-copy script truncates the staging table before writing the data from the source again on a schedule.

If there is not a separate method to ensure the staging table exists, there is an option to auto create the table based on the source data.

General Source **Sink** Mapping Settings User properties

Sink dataset *: LSInsightDW

Dataset properties

Name	Value
DestTableName	stg\$ExtCustomerCounter

Stored procedure name: Select... Refresh

Parameter: + New

Table option: None Auto create table


Pre-copy script

```
IF EXISTS (SELECT 1 FROM INFORMATION_SCHEMA.TABLES
WHERE TABLE_NAME = 'stg$ExtCustomerCounter')
TRUNCATE TABLE stg$ExtCustomerCounter
```

Write batch timeout: []


Write batch size: []

Import the schemas and verify the mapping.

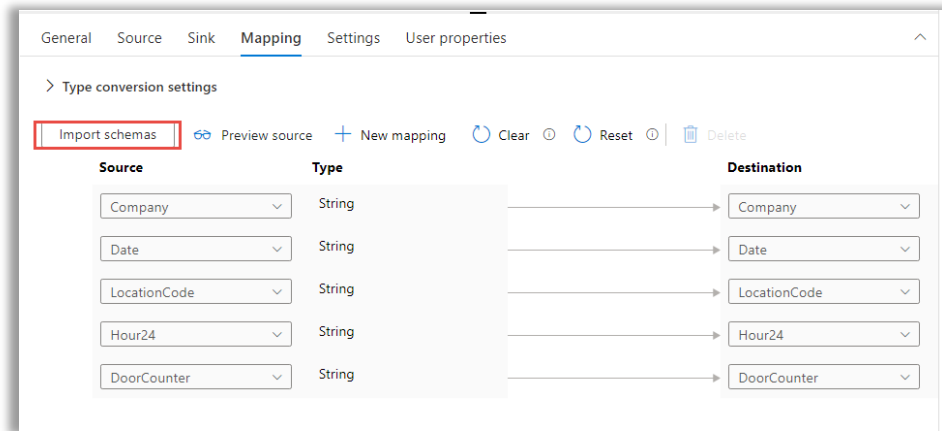


Add Write to audit table action

Add a failure activity to the copy action to be able to trigger an activity when the copy activity has a failure.

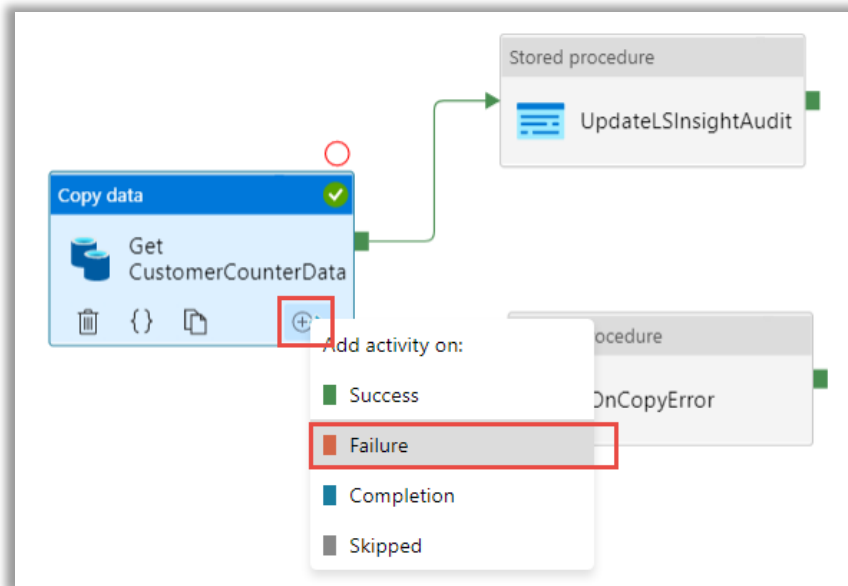


Add two “Stored procedure” activities that will both execute [dbo].[UpdateLSInsightAudit] and connect Success to *UpdateLSInsightAudit* and failure to *OnCopyError*

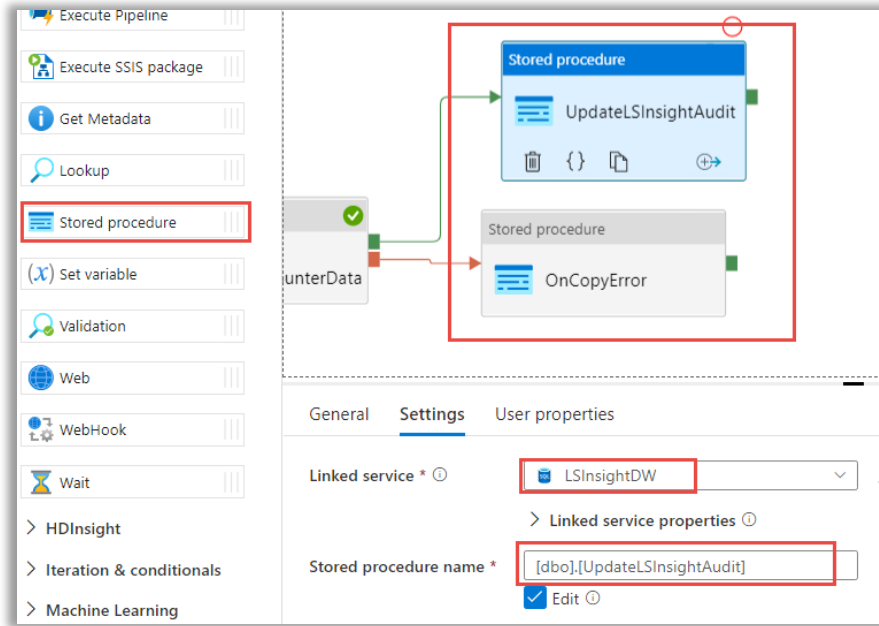

Update LSInsightAudit on success

Set the SP variables as follows for the success activity – *UpdateLSInsightAudit*:

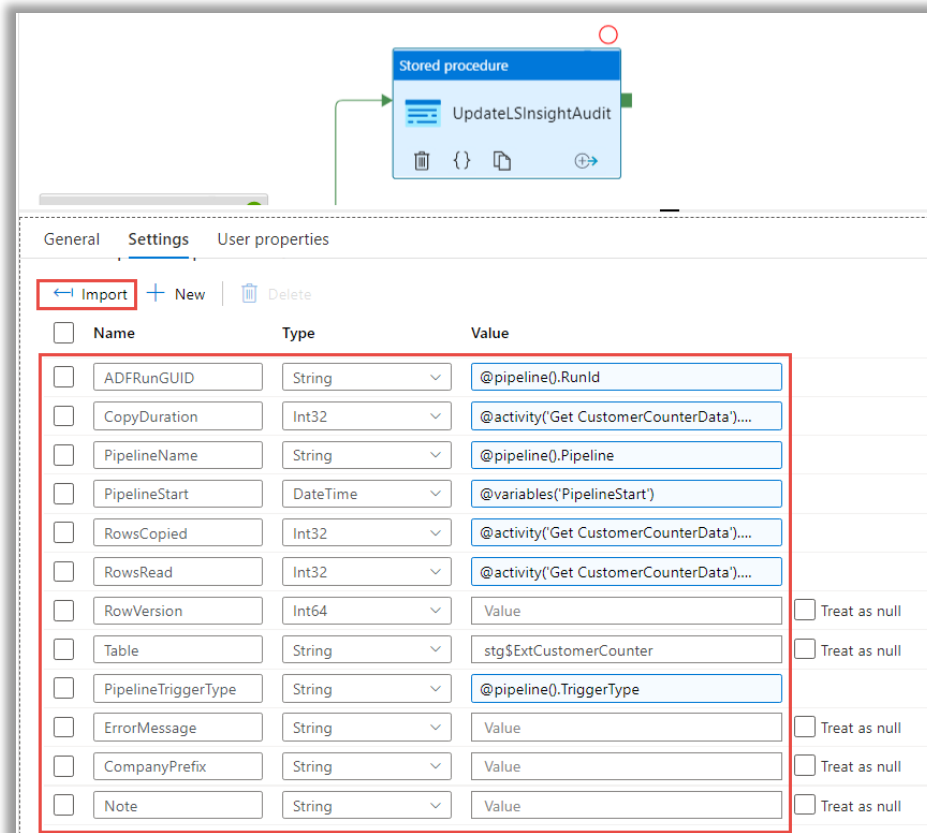

ADFRunGUID = @pipeline().RunId
CopyDuration = @activity('Get CustomerCounterData').output.copyDuration
PipelineName = @pipeline().Pipeline
PipelineStart = @variables('PipelineStart')
RowsCopied = @activity('Get CustomerCounterData').output.rowsCopied
RowsRead = @activity('Get CustomerCounterData').output.rowsRead
RowVersion is only used when you need to set up Incremental loading
Table = stg\$ExtCustomerCounter (the name of the staging table you are writing to)
PipelineTriggerType = @pipeline().TriggerType
ErrorMessage is not used here
CompanyPrefix used if you have multiple company setup in your data
Note – free space to add additional information

Update LSInsightAudit on failure


On the failure activity, *OnCopyError*, the following settings apply for the same stored procedure:

ADFRunGUID = @pipeline().RunId
CopyDuration = 0
PipelineName = @concat('Failed Run - ', pipeline().Pipeline)
PipelineStart = @variables('PipelineStart')
RowsCopied = 0
RowsRead = 0
RowVersion = 0
Table = stg\$ExtCustomerCounter (the name of the staging table you are writing to)
PipelineTriggerType = @pipeline().TriggerType
ErrorMessage = @activity('Get CustomerCounterData').Error.Message
CompanyPrefix used if you have multiple company setup in your data

Large data source

For large datasets where daily full load is not an option you will need incremental load. For this you will need to get the Current timestamp (or the column used in your case to determine the incremental load) and the last timestamp from the audit table.

Here is an example from the All staging Tables pipeline:

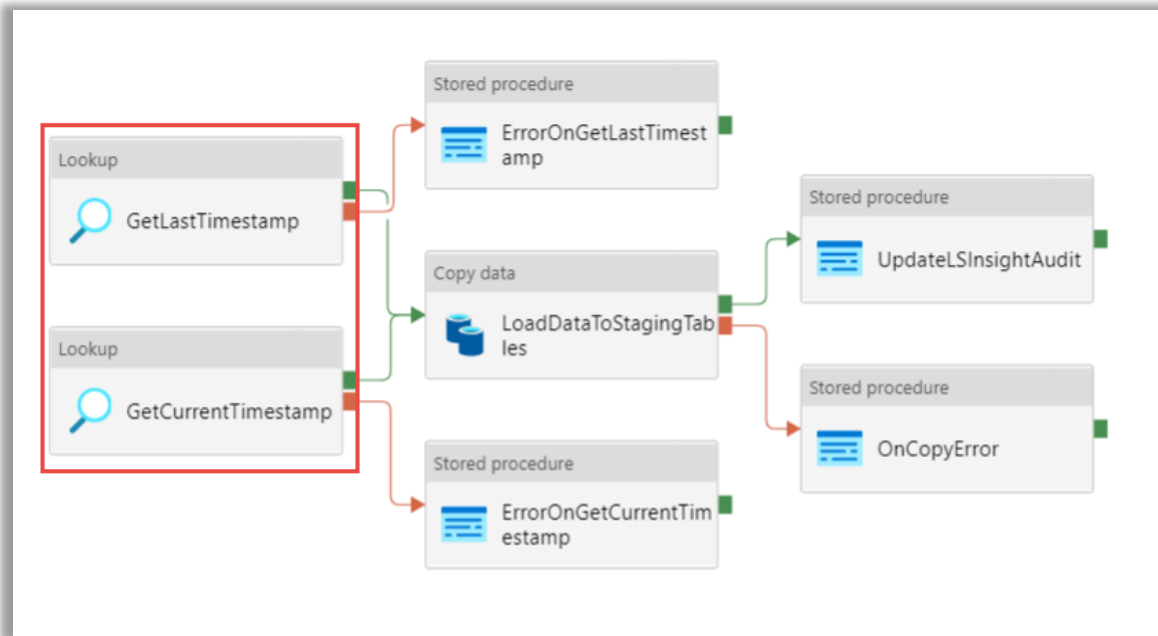

The last timestamp is extracted from the table LSInsightAudit (variables('Control_Table_Table_Name'))

The screenshot shows the 'Add dynamic content' window in SQL Server Data Tools. A red box highlights the following SQL query:


```
@concat('SELECT max([NewRowVersion]) AS LastTimestamp
FROM ', variables('Control_Table_Table_Name'), '
where [Table] = "', item().BaseTableName, '" AND [CompanyPrefix] = "', item().TablePrefix, '" ')
```

Below the query, there is a 'Clear contents' button and a note: 'Add dynamic content above using any combination of expressions, functions and system variables. Click any of the available System variables or Functions below to add them directly:'. A search box labeled 'Filter system variables and functions...' is also visible.


A similar method is used to get the maximum timestamp from the source data and then this information is used in the source query to only load new data to the DW.

Add staging pipeline to scheduled run

Add the staging pipeline to the Scheduled run pipeline to have the data loaded on the selected schedule with the LS Insight schedule:

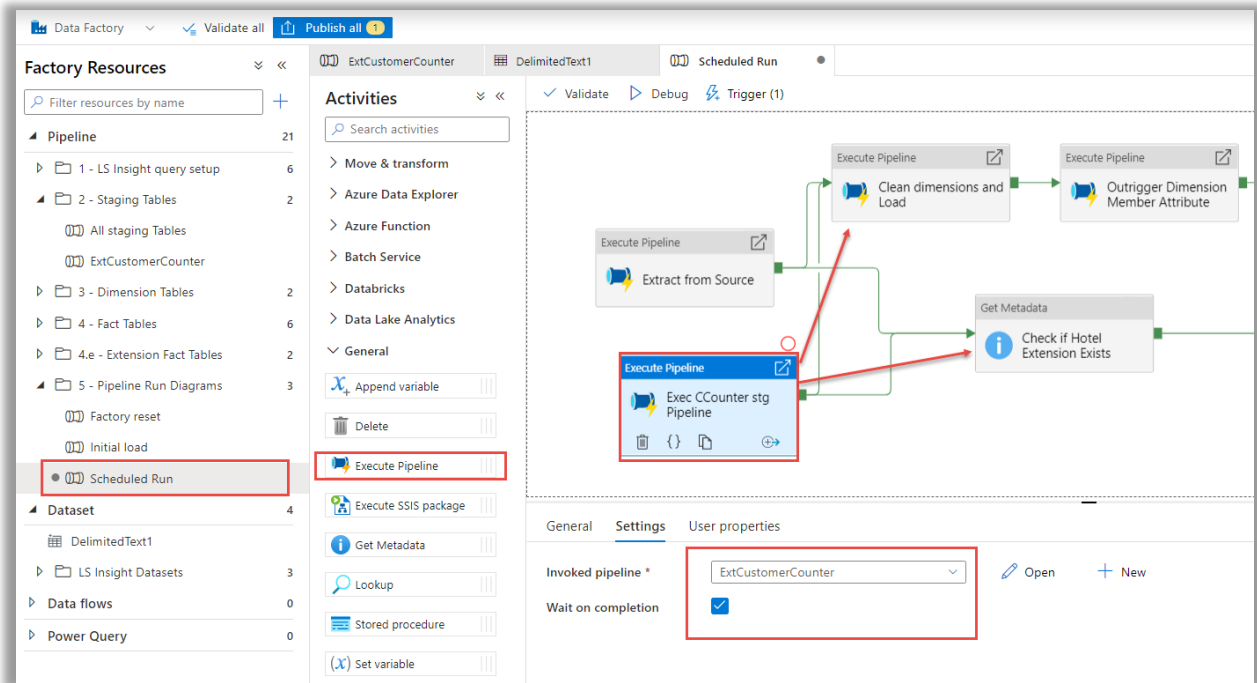

Now when the scheduled run is triggered, the source data will be written to the LS Insight database as a staging table:

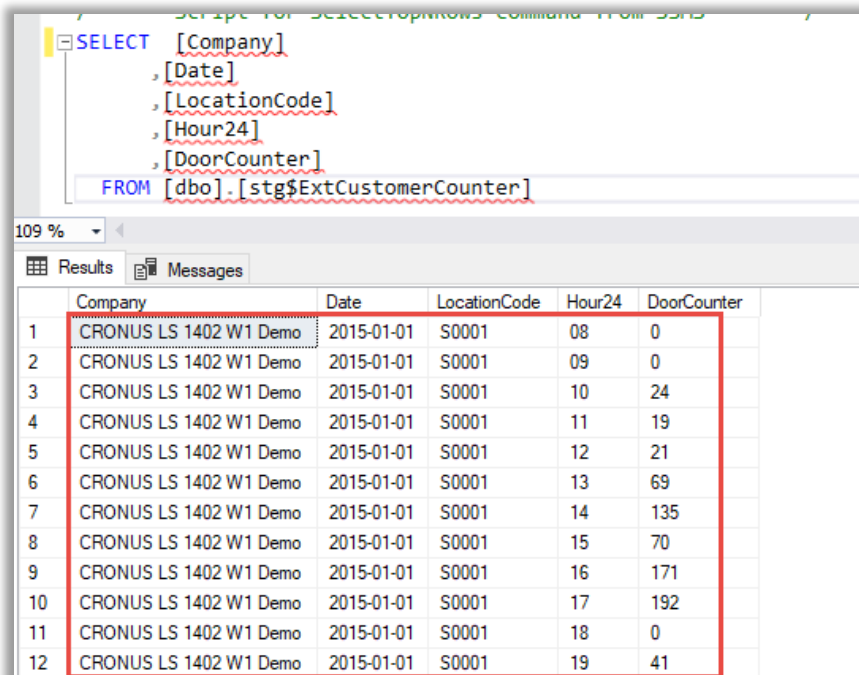

Add fact table to star schema

Create a connected fact table

First create the destination table with the correct surrogate keys (SK_*) for the connected dimensions. Name the schema “DW” and the first letter in the table name “f” to distinguish it from staging and dimension tables.

Here is the create script for this example:

```
CREATE TABLE [DW].[fCustomerCounter](
    [Company] [int] NULL,
    [SK_Location] [int] NULL,
    [LocationCode] [nvarchar](100) NULL,
    [Date] [date] NULL,
    [Hour24] [nvarchar](2) NULL,
    [DoorCounter] [int] NULL
) ON [PRIMARY]
```

Create a Stored Procedure

Create a Stored Procedure that meets your requirements for populating data in the fact table. Make sure to add the surrogate keys (SK_*) for the connected dimensions. The surrogate keys are used in the Power BI reports to determine the table relationships.

Here is an example of the stored procedure for the customer counter data used in this documentation.

It is a good idea to have a naming convention for any extra items in the LS Insight database – in this example the affix “Ext” is used.

```
CREATE PROCEDURE [dbo].[ExtfactCustomerCounter]
AS
/* Ensure the stored procedure does not execute unless the source staging table exist */
IF EXISTS (SELECT
    *
    FROM INFORMATION_SCHEMA.TABLES
    WHERE TABLE_NAME = 'stg$ExtCustomerCounter')
BEGIN
SET NOCOUNT ON;

WITH
/* Get the list of companies used */
tCompanies
AS
(SELECT
    dCOM.[SK_Company] AS [Company]
    ,dCOM.[CompanyPrefix]
    FROM [DW].[dCompany] dCOM
    WHERE dCOM.[SK_Company] <> -1),
/* Get the dimension(s) needed to connect to the fact table */
```

```

tLocation
AS
(SELECT
    dLOC.[SK_location]
    ,tCOM.[CompanyPrefix]
    ,dLOC.[LocationCode]
FROM DW.[dLocation] dLOC
LEFT OUTER JOIN [tCompanies] tCOM
    ON dLOC.[Company] = tCOM.[Company]),

/* Get the data from the staging table and connect to the dimensions used */
tCustomerCounter
AS
(SELECT
    COALESCE(dCOM.[SK_Company], -1) AS [Company]
    ,COALESCE(tLOC.SK_Location, -1) AS [SK_Location]
    ,sECC.[LocationCode]
    ,[Date]
    ,[Hour24]
    ,[DoorCounter]
FROM [dbo].[stg$ExtCustomerCounter] sECC
LEFT JOIN [tLocation] tLOC
    ON sECC.[Company] = tLOC.[CompanyPrefix]
    AND sECC.[LocationCode] = tLOC.[LocationCode]
LEFT JOIN [DW].[dCompany] dCOM
    ON dCOM.[CompanyPrefix] = sECC.[Company])

/* Use merge to update the fact table */
MERGE [DW].[fCustomerCounter] AS Target USING (SELECT
    [Company]
    ,[SK_Location]
    ,[LocationCode]
    ,[Date]
    ,[Hour24]
    ,[DoorCounter]
FROM tCustomerCounter) AS Source
ON Target.[Company] = Source.[Company]
AND Target.[LocationCode] = Source.[LocationCode]
AND Target.[Date] = Source.[Date]
AND Target.[Hour24] = Source.[Hour24]

WHEN MATCHED
    THEN UPDATE
        SET [SK_Location] = Source.[SK_Location]
        ,[DoorCounter] = Source.[DoorCounter]

WHEN NOT MATCHED BY TARGET
    THEN INSERT ([Company]
        ,[SK_Location]
        ,[LocationCode]
        ,[Date]
        ,[Hour24]
        ,[DoorCounter])
        VALUES (Source.[Company],
            Source.[SK_Location],Source.[LocationCode],
            Source.[Date], Source.[Hour24], Source.[DoorCounter])

/* OPTIONAL if records should be deleted in the DW is they are removed from the source data
Usually records are not deleted from DW

WHEN NOT MATCHED BY SOURCE

```

```


THEN DELETE
*/
;
/* SELECT Rowcount is needed for the Azure Data Factory pipeline so the activity has results to determine
successful execution*/
SELECT
    'RowCount' = @@rowcount
;
END
    
```

Add a fact table Stored Procedure to ADF pipeline


Create Pipeline to execute SP

Create a new pipeline and place it in the folder “4.e - Extension Fact Tables”. Give the pipeline a descriptive name, for example “PL-SP-ExtCustomerCounter”, and create a variable named “PipelineStart”.

Add the following activities: *Set variable*, *Lookup*, and 2 instances of *Stored procedure*. Connect as shown in the image:

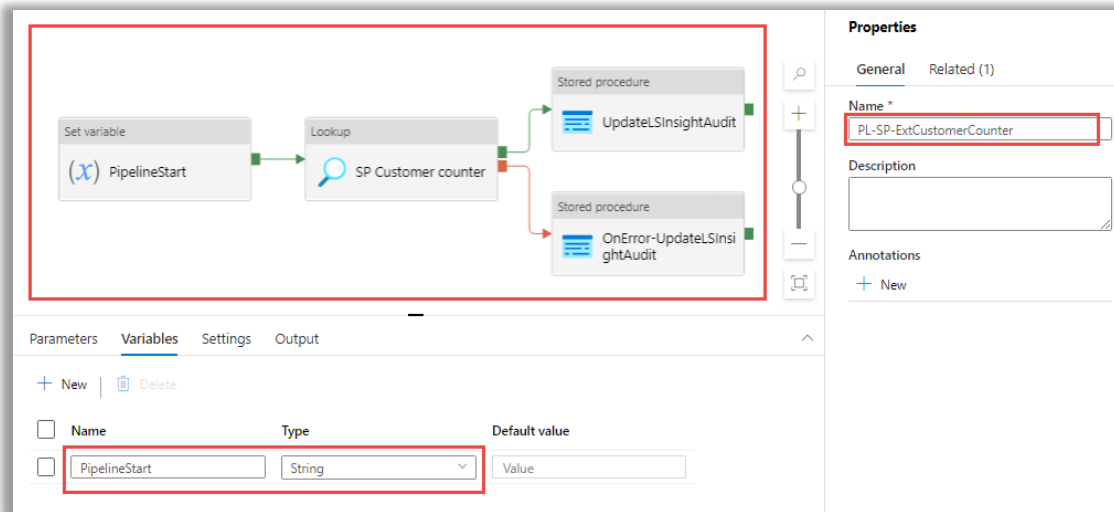

Set the Variable to utcnow() using “Add dynamic content”:

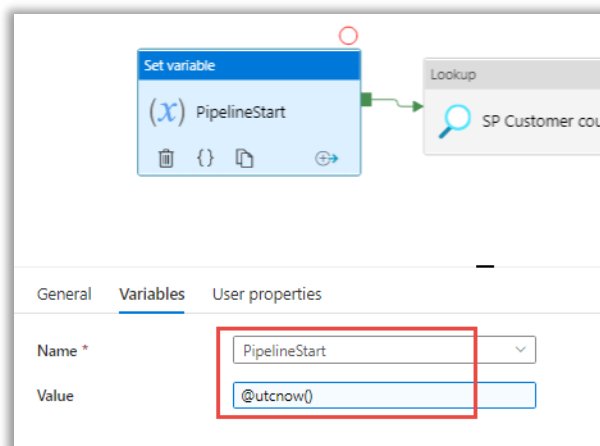

Set the Lookup activity to execute the stored procedure “[dbo].[ExtfactCustomerCounter]”:


The screenshot shows the configuration of a Lookup activity in an SSIS package. The activity is named "SP Customer counter" and is connected to a "Set variable" activity (PipelineStart) and two "UpdateLSInsightAudit" activities. The configuration pane is open to the "Settings" tab, showing the following settings:

- Source dataset: **LSInsightDW**
- Dataset properties:

Name	Value
DestTableName	NA
- Use query: **Stored procedure**
- Stored procedure name: **[dbo].[ExtfactCustomerCounter]**
- Query timeout (minutes): 120
- Isolation level: None
- Partition option: **None**
- First row only:

Update LS Insight Audit

Set the properties for *UpdateLSInsightAudit* and *OnError-UpdateLSInsightAudit* to write correct information in the LSInsightAudit table.

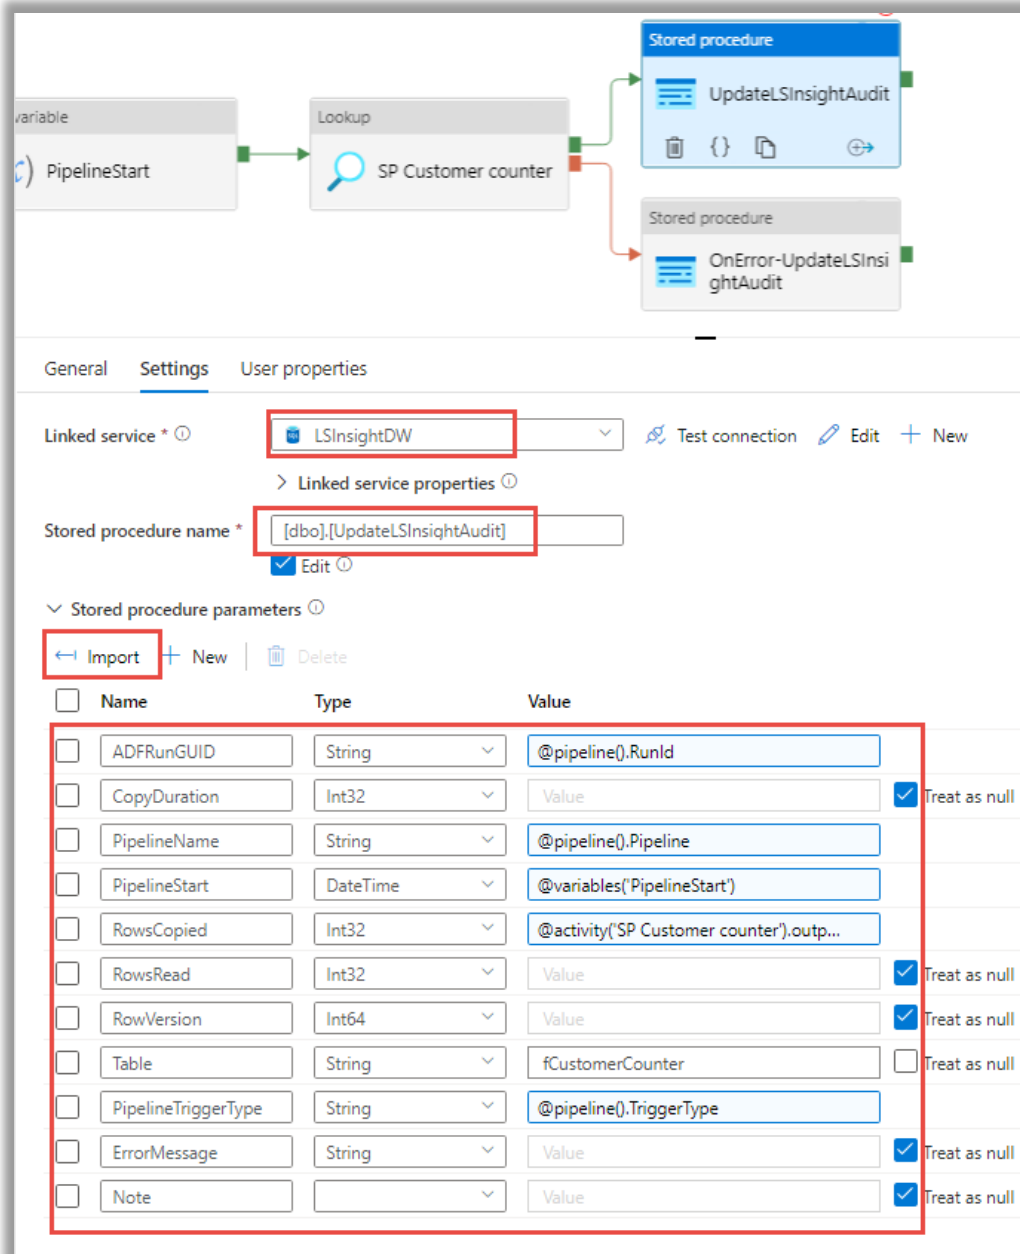

ADFRunGUID = @pipeline().RunId

CopyDuration = Treat AS null

PipelineName = @pipeline().Pipeline

PipelineStart = @variables('PipelineStart')

RowsCopied = @activity('SP Customer counter').output.firstRow.RowCount

RowsRead = Treat AS null

RowVersion is only used when you need to set up Incremental loading - Treat AS null in this scenario

Table = fCustomerCounter (the name of the fact table you are writing to)

PipelineTriggerType = @pipeline().TriggerType

ErrorMessage is not used here

Note – free space to add additional information

Update LSInsightAudit on failure

On the failure activity the following settings apply for the same stored procedure

ADFRunGUID = @pipeline().RunId

CopyDuration = 0

PipelineName = @concat('Failed Run - ', pipeline().Pipeline)

PipelineStart = @variables('PipelineStart')

RowsCopied = 0

RowsRead = 0

RowVersion = 0


Table = fCustomerCounter (the name of the fact table you are trying to write to)

PipelineTriggerType = @pipeline().TriggerType

ErrorMessage = @activity('SP Customer counter').error.message

Add Facttable pipeline to scheduled run

Add an “Execute pipeline” activity to the Scheduled Run pipeline. Depending on your requirements set the depend lineage – In this demo the customer counter fact table will start populating after all dimension activities have completed.

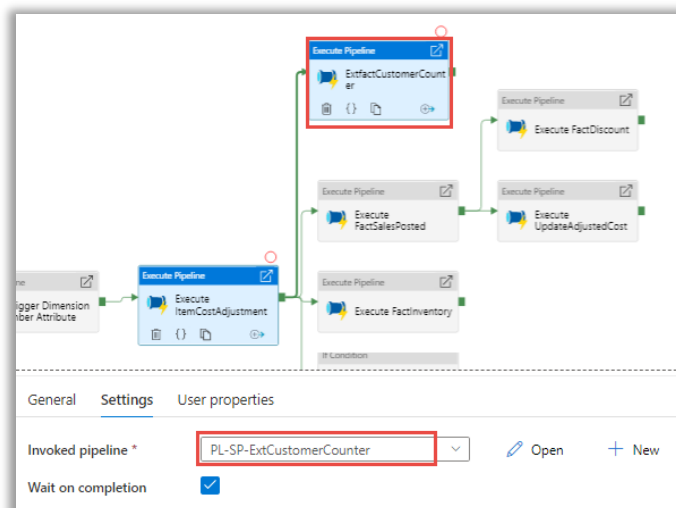


On your next scheduled run the new table will be available in the LS Insight DW and you can add to new data to your reports.

Add data directly in Power BI


There is also an option to add data tables directly in the data model in Power BI. In this demo the same data source is added to the model and used in a report page. Same or similar steps apply when using the data from the fact table created above. The difference is the source type and with the fact table there is no need to look up the correct surrogate key from the relevant dimensions.

Get a new source

In Power BI desktop, open *Home – Transform data – Transform data*:

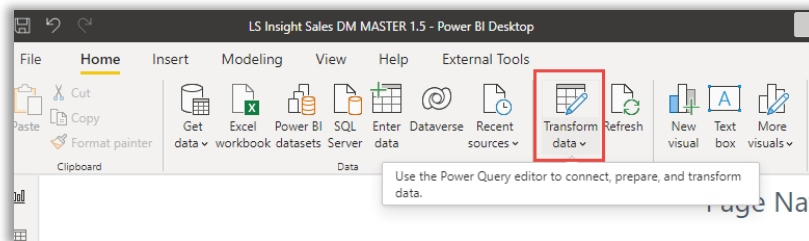


Select *New Source* and in this case *Text/csv*:

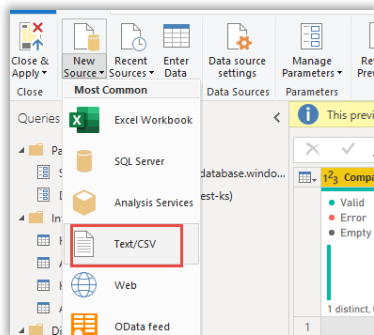


Select the source data and verify columns before loading to the data model.

Merge to get surrogate keys

Fact tables are linked to dimensions through surrogate keys. Merge queries is a simple method to add the correct keys from the dimensions.

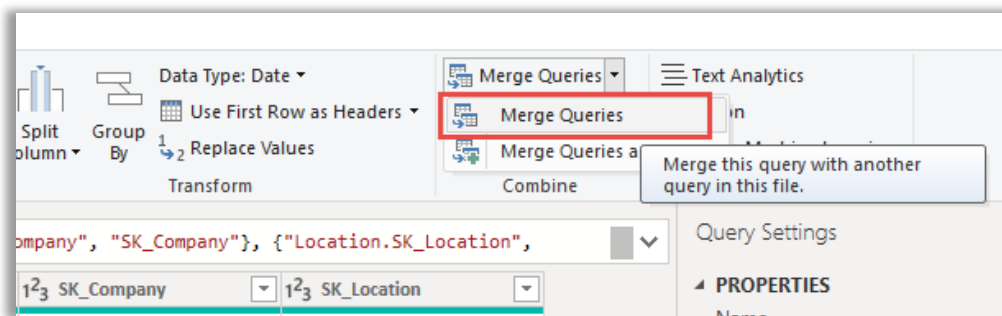


Select the keys that match and click “OK”:

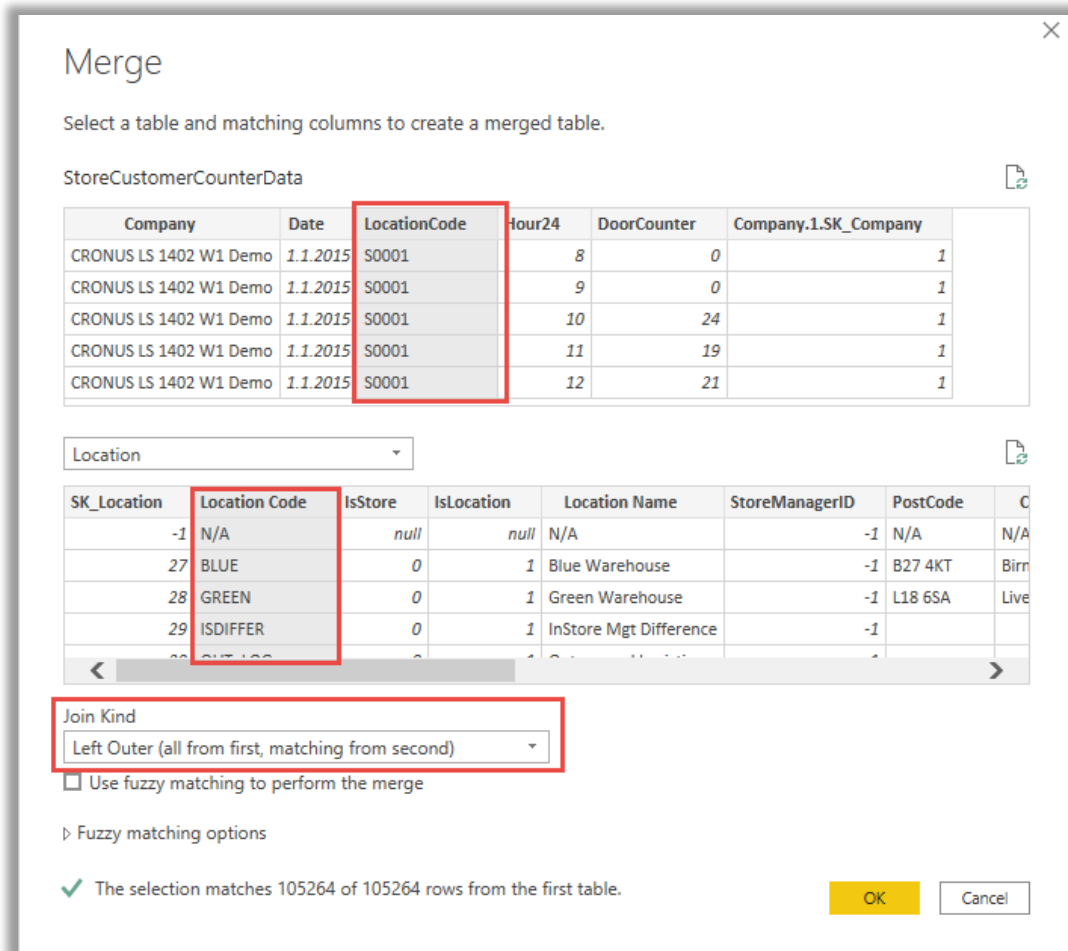

This needs to be done for the Location and Company dimensions (in this example).


Expand merged tables

You only need to add the surrogate key from the linked tables. This is done by expanding the linked table and selecting the desired columns:

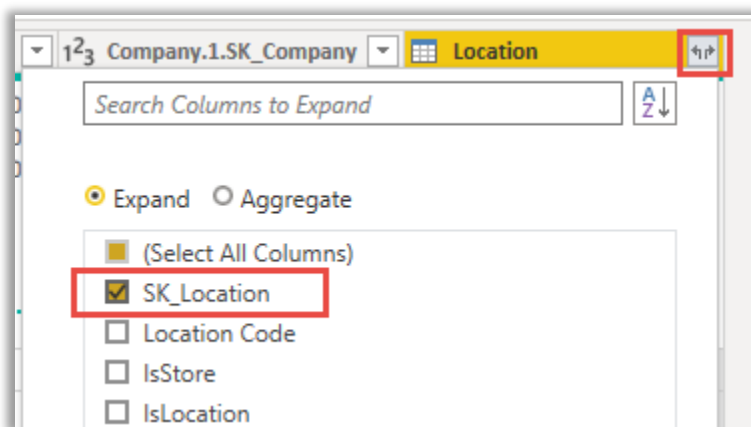

Remove unnecessary columns

After the surrogate keys have been added to the new fact table, the business keys in the fact table can be removed as they will never be used.

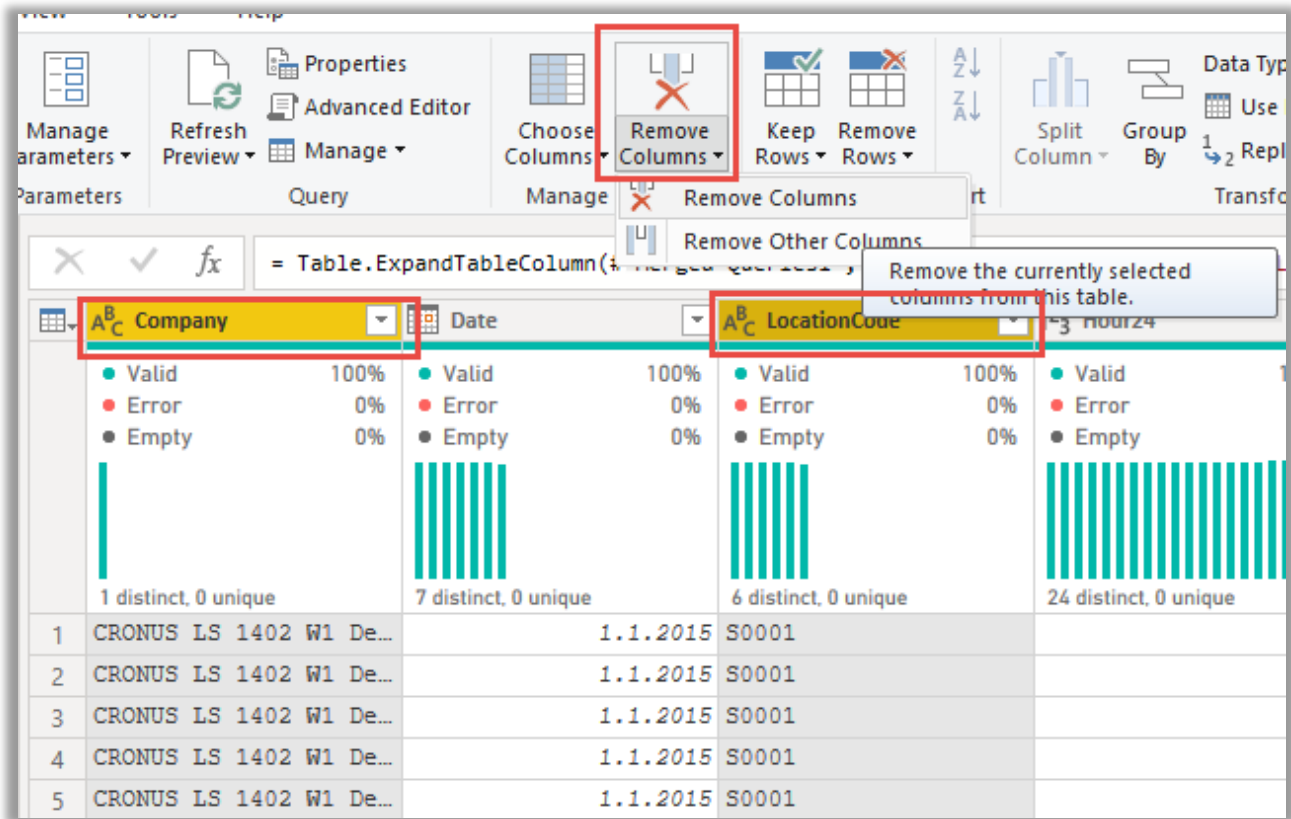

M query

The final M query looks like this:

let

```

Source = Csv.Document(File.Contents("C:\CustomerCounter\StoreCustomerCounterData.txt"),[Delimiter="
", Columns=5, Encoding=1252, QuoteStyle=QuoteStyle.None]),

#"Promoted Headers" = Table.PromoteHeaders(Source, [PromoteAllScalars=true]),

#"Changed Type" = Table.TransformColumnTypes("#"Promoted Headers",{{"Company", type text}, {"Date",
type date}, {"LocationCode", type text}, {"Hour24", Int64.Type}, {"DoorCounter", Int64.Type}}),

#"Merged Queries" = Table.NestedJoin("#"Changed Type", {"Company"}, Company, {"Company Name"},
"Company.1", JoinKind.LeftOuter),

#"Expanded Company.1" = Table.ExpandTableColumn("#"Merged Queries", "Company.1", {"SK_Company"},
{"Company.1.SK_Company"}),

#"Merged Queries1" = Table.NestedJoin("#"Expanded Company.1", {"LocationCode"}, Location, {"Location
Code"}, "Location", JoinKind.LeftOuter),
    
```

```
#"Expanded Location" = Table.ExpandTableColumn("#Merged Queries1", "Location", {"SK_Location"}, {"Location.SK_Location"}),
```

```
#"Removed Columns" = Table.RemoveColumns("#Expanded Location",{"Company", "LocationCode"}),
```

```
#"Renamed Columns" = Table.RenameColumns("#Removed Columns",{"Company.1.SK_Company", "SK_Company"}, {"Location.SK_Location", "SK_Location"})
```


in

```
#"Renamed Columns"
```

Define relationships in PowerBI

The steps from this point apply both for using a custom fact table in the LS Insight DW or for using the steps above to add data directly to the data model in Power BI.

Define the relationships from the new fact table to the related dimensions. In this example, the connected dimensions are: Date, Time, Company, and Location.

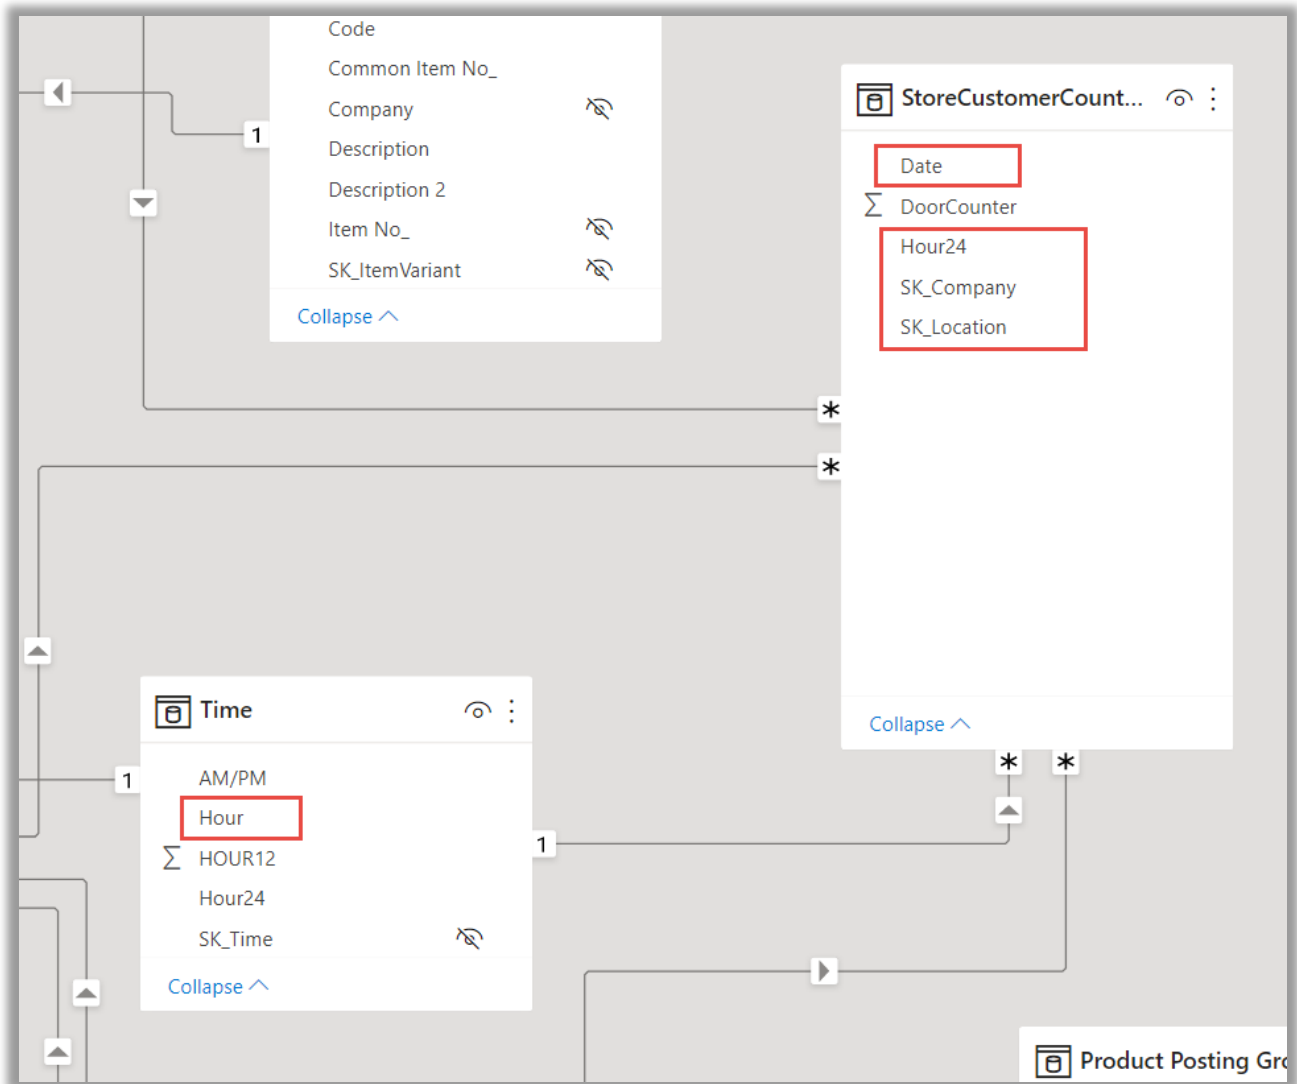

Use the new data in a report page

With the new data it is possible to create custom DAX calculations or, depending on the data, use the data directly in a current or new visual.

Here is an example where the average number of customers entering the locations is compared with the average net sale per transaction:

